




## MOTORIZED BENCH CENTER

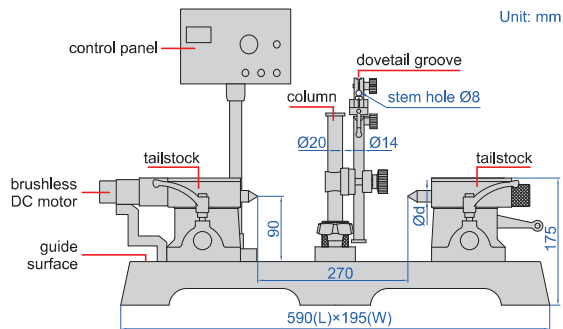

- Moveable column
- Hardened cast-iron guide surface
- Motorized measurement is suitable for mass production inspection
- Power supply: AC220V/10A/(50/60)Hz
- Optional accessory: dial test indicators

| Code     | Parallelism* | Runout accuracy | Center height | Distance between two centers | Diameter of center (Ød) | Taper of center | Weight | Load |
|----------|--------------|-----------------|---------------|------------------------------|-------------------------|-----------------|--------|------|
| 4735-270 | 0.010mm      | 2µm             | 90mm          | 270mm                        | 18mm                    | MT2             | 40kg   | 25kg |

\*Parallelism of two centers to the guide surface