

SMART DIGITAL THICKNESS GAUGES



2850-10


- Linear ball bearings for ten million times use
- Absolute encoder, the original data remains after power off
- Adjustable resolution: 0.0005mm/0.00002"
0.001mm/0.00005"
0.01mm/0.0005"
- Ceramic spindle tip and anvil
- Reading in digital and analog
- Data output
- Automatic measurement of the min. value, and the data can be transmitted automatically after each measurement
- Button function: data output, tolerance, data preset, data hold, measuring direction change, power off time, on/off, mm/inch, adjust resolution
- Power: rechargeable battery, for 24 hours continuous working

With data interface

Optional accessory:

wireless transmitter code **7315-60**, receiver is needed

Code	Range	Accuracy
2850-10	10mm/0.4"	±3μm

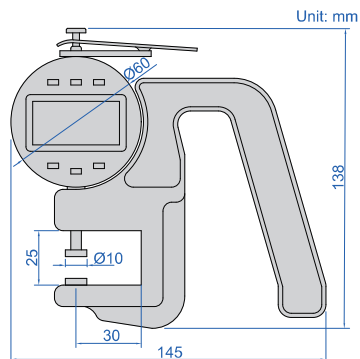

AUTOMATIC MEASUREMENT OF THE MIN. VALUE, AND THE DATA CAN BE TRANSMITTED AUTOMATICALLY AFTER EACH MEASUREMENT


DATA
OUTPUT

LINEAR BALL BEARINGS
FOR TEN MILLION TIMES USE


ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING

analog pointer



alarm when
over tolerance



wireless receiver
2134-R1, 2134-R2 (optional)



Built-in wireless

Optional accessory:

wireless receiver (keyboard format,

connect up to 15 digital indicators), code **2134-R1**

wireless receiver (serial port format,

connect up to 15 digital indicators), code **2134-R2**

Code	Range	Accuracy
2850-10WL	10mm/0.4"	±3μm