



QUICK POSITIONING CONCENTRICITY GAUGES



QUICK-POSITIONING, SUITABLE
FOR MASS MEASUREMENT

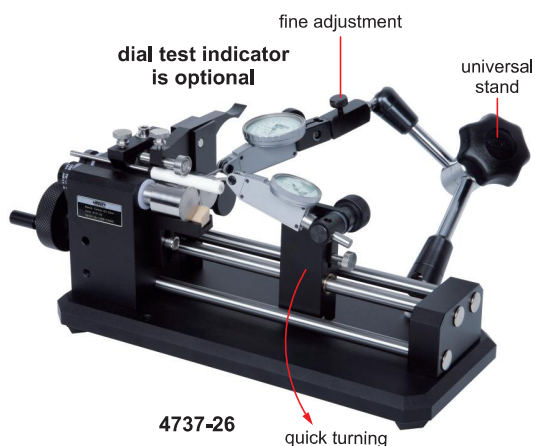

standard rod
(included)

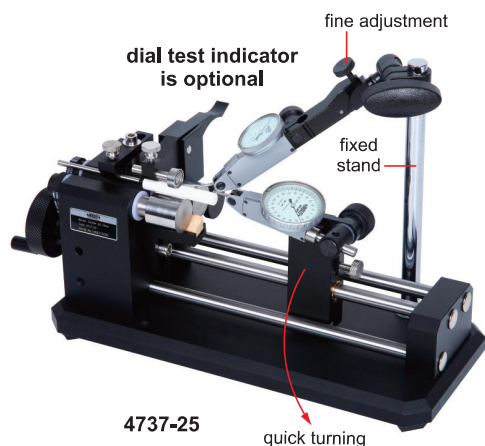

to ensure the accuracy $2\mu\text{m}$,
the distance between measuring
point and roller should be $<30\text{mm}$

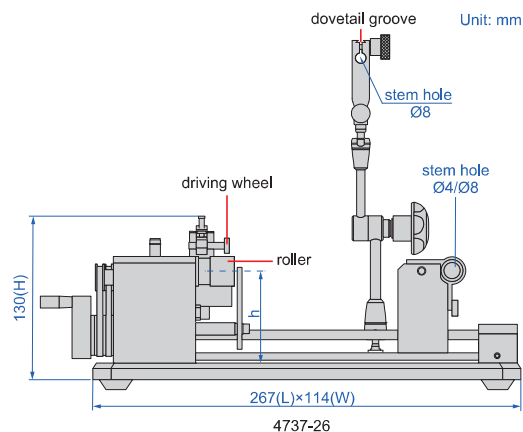

- Quick positioning, suitable for mass measurement
- Supplied with standard rod to verify accuracy
- Optional accessory: dial test indicators

Code	Diameter range	Workpiece length	Accuracy	Center height (h)	L×W×H	Weight	Remark
4737-25	Ø3-25mm	15-100mm	$2\mu\text{m}$	70mm	267×114×130mm	3kg	fixed stand, good rigidity
4737-26	Ø3-25mm	15-100mm	$2\mu\text{m}$	70mm	267×114×130mm	3kg	universal stand, convenient operation